



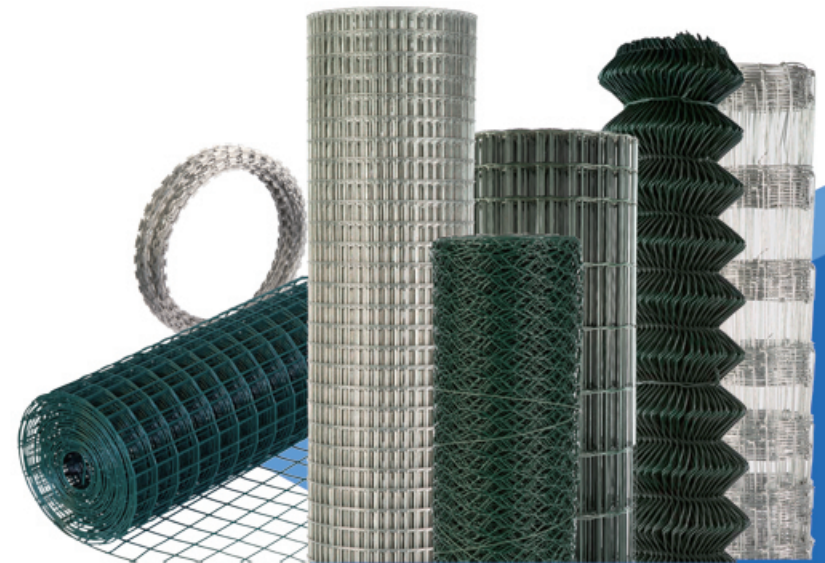

衡水领步金属制品有限公司
Hengshui LeadWalking Metals Products Co.,Ltd

中国河北省衡水市安平县工业园区
Industrial park Anping county
Hengshui city Hebei province China
TEL: +86-318-5286777
E-mail: info@leadwalking.com
www.leadwalking.com

衡水领步金属制品有限公司
Hengshui LeadWalking Metals Products Co.,LTD

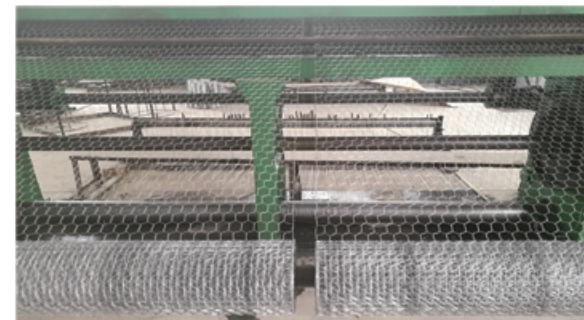

衡水领步金属制品有限公司成立于2008年，是一家AAA企业。公司目前拥有20名专业从事贸易的员工，领步金属是一家不断发展壮大的新兴公司。2018年我们创造了1000万美元的销售额，这是我们成立以来的新高。主要产品有：电焊网、农用围栏、六角网、铁丝网、格宾笼、铁丝等。产品主要出口欧洲、美洲、南美洲等国家和地区。

公司拥有1家独资工厂、3家合资工厂和20多家紧密合作的专业工厂，为客户提供各种五金产品和园林农产品。我们视质量为我们的最高追求。为了达到最好的质量控制，我们建立了一个团队，负责从生产到集装箱装卸和运输的整个订单过程中的货物检验。

我们始终坚持以为客户提供高质量的产品和有竞争力的价格，拥有经验丰富的销售团队，为世界各地的客户提供最好的服务。

Hengshui LeadWalking Metals Products Co.,LTD,established in 2008. is an "AAA class".We currently have 20 employees who are professionals in the trading industry joined our family. LeadWalking Metals is a rising company that keeps growing and expanding. In 2018,we generated sales of 10 million US dollars,which was a new high since our foundation. Our main products are welded wire mesh,field fencing,hexagonal netting,barbed wire,gabion boxes,iron wire,etc.Most of our products are export to Europe,America,South America,and so on.

With a wide range of hardware and garden and farm products provided, we have one owned factory,three joint venture factories and more than 20 closely cooperated professional factories to satisfy our customer's needs.We regard quality as our top pursuit.To have the best quality control,we create a team that responsible for goods inspections during the whole order process from manufacturing to container loading,unloading,and transportation.

We have always been sticking to provide our clients with high quality products and competitive prices,having experienced sales team to offer the best service to the clients all over the world.

Galvanized Welded Wire Mesh 镀锌电焊网》》》

材质:低碳钢丝、不锈钢丝

制造工艺:后热镀、先热镀、后电镀、先电镀

特点:网面光滑,焊点牢固,结构坚固,具有良好的防腐、抗氧化性能。

用途:广泛用于养殖、植物围栏、建筑、工业。

Material: Low carbon steel wire, stainless steel wire

manufacturing process:

Hot Dipped Galvanized Before Welding



Hot Dipped Galvanized After Welding

Electro Galvanized Before Welding

Electro Galvanized After Welding


Characteristics: The welding mesh surface is smooth, the solder joint is firm, the structure is firm, and it has good corrosion resistance and oxidation resistance.

Application: Widely used in breeding, plant fencing, construction, industry.

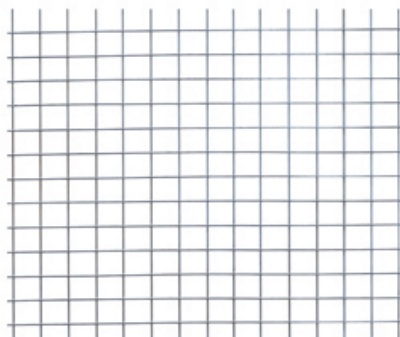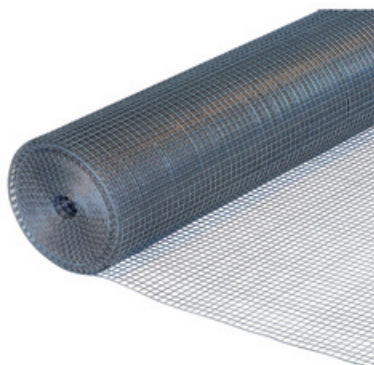

网孔 Opening		丝径 Wire Thickness(mm)
In inch	In Metric Unit(mm)	0.50-3.00
1/4" x 1/4"	6.0 x 6.0	
3/8" x 3/8"	10.0 x 10.0	
1/2" x 1/2"	12.0 x 12.0	
5/8" x 5/8"	16.0 x 16.0	
3/4" x 3/4"	19.0 x 19.0	
1" x 1/2"	25.0 x 12.0	
1" x 1"	25.0 x 25.0	
1" x 2"	25.0 x 50.0	
2" x 2"	50.0 x 50.0	
3" x 2"	75.0 x 50.0	
4" x 3"	100.0 x 75.0	
1. Standard Roll Length: 5m, 10m, 25m, Width: 0.5m-2.0m.		2. Package: Each roll wrapped by water proof paper. Each roll with plastic film absorbed. *Custom Sizes and Package available at request.

PVC Coated Welded Wire Mesh 涂塑电焊网》》》

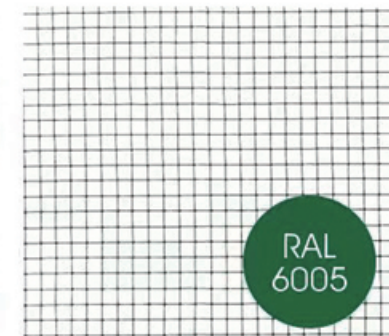

RAL
6005

网孔 Opening		丝径 Wire Thickness(mm)	
In inch	In Metric Unit (mm)	Before coating	After coating
1/4" x 1/4"	6 x 6	0.4-0.75	0.75-1.1
3/8" x 3/8"	10 x 10	0.4-1.0	0.75-1.35
1/2" x 1/2"	12 x 12	0.45-1.4	0.8-1.75
5/8" x 5/8"	16 x 16	0.4-1.4	0.8-1.8
3/4" x 3/4"	19 x 19	0.45-1.6	0.85-2.0
1" x 1"	25x 25	0.7-2.1	1.1-2.5
2" x 2"	50x 50	1.0-2.2	1.4-2.6
2" x 4"	50x100	1.0-2.2	1.4-2.6
1. Standard Roll Length: 5m, 10m, 25m, Width: 0.5m-2.0m.			
2. Package:			
Each roll wrapped by water proof paper.			
Each roll with plastic film absorbed.			
*Custom Sizes and Package available at request.			

Galvanized hexagonal wire netting

镀锌六角网》》》

材质:低碳钢丝、不锈钢丝

编织工艺:正捻、正反捻、先热镀后编、先编后热镀、先电镀后编

特点:结构坚固、表面平整、耐腐蚀、抗氧化性好。

用途:用于家禽笼围栏、钓鱼围栏、花园及儿童游乐场围栏、动物园围栏、体育场馆围栏、道路绿化带防护网。

Material: Low carbon steel wire, stainless steel wire

Weaving process:




Hot dipped galvanized before weaving

Hot dipped galvanized after weaving

Electro galvanized before weaving

Characteristics: Solid structure, flat surface, good corrosion resistance, and oxidation.

Application: Used as fences for poultry cage, fishing, garden and children playground, zoo fence, sports venues fence, road green belt protection net.



Mesh 网孔		Wire Thickness	Height	Length
inch	mm	mm	cm	m
3/8"	10	0.4-2.5	50-200	5-50
1/2"	13			
5/8"	16			
3/4"	19			
1"	25			
1-1/4"	31			
1-1/2"	40			
2"	50			
3"	75			
4"	100			

Package:

Each roll wrapped by water proof paper.

Each roll with plastic film absorbed.

*Custom Sizes and Package available at request.

PVC Coated Hexagonal wire netting


涂塑六角网》》》

编织工艺:先涂塑后编织、先编织后涂塑

Weaving process:

PVC Coated Before Weaving

PVC Coated After Weaving



Mesh		Wire Thickness	Height	Length
inch	mm	mm	cm	m
3/8"	10	0.4-2.5	50-200	5-50
1/2"	13			
5/8"	16			
3/4"	19			
1"	25			
1-1/4"	31			
1-1/2"	40			
2"	50			
3"	75			
4"	100			

Package:

Each roll wrapped by water proof paper.

Each roll with plastic film absorbed.

*Custom Sizes and Package available at request.

Field fence

牛栏网 >>>

材质:高强度热镀锌丝


特点:采用自动机械镀锌打结,设计合理,表面美观,抗拉强度高,耐腐蚀性强。

用途:用于草原围栏、养殖围栏,生态工程防护等。

Material:High strength hot dipped galvanized wire

Characteristics:Automatic mechanical galvanized knot, reasonable design,beautiful surface, high tensile strength, strong corrosion resistance.

Application:Used for grassland fence, breeding fence, ecological engineering protection, etc.

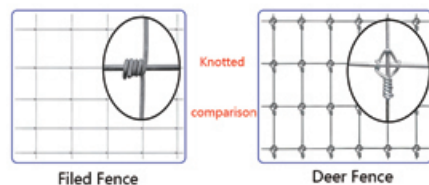

Type	Specifications(the incremental vertical hole sizes)	Gross Weight (kgs)	Top and Bottom Wire Thickness(mm)	Inner Wire Thickness(mm)
7/150/813/50	102*114*127*140*152*178	19.3	2.5	2
8/150/813/50	89(75)*89*102*114*127*140*152	20.8	2.5	2
8/150/902/50	89*102*114*127*140*152*178	21.6	2.5	2
8/150/1016/50	102*114*127*140*152*178*203	22.6	2.5	2
8/150/1143/50	114*127*140*152*178*203*229	23.6	2.5	2
9/150/991/50	89(75)*89*102*114*127*140*152*178	23.9	2.5	2
9/150/1245/50	102*114*127*140*152*178*203*229	26	2.5	2
10/150/1194/50	89(75)*89*102*114*127*140*152*178*203	27.3	2.5	2
10/150/1334/50	89*102*114*127*140*152*178*203*229	28.4	2.5	2
11/150/1422/50	89(75)*89*102*114*127*140*152*178*203*229	30.8	2.5	2



Euro Fence

荷兰网 >>>

材质:低碳钢丝。

制造工序:围栏采用优质镀锌钢丝焊接而成,中间带有波纹,然后再涂PVC。

特点:美观大方,坚固耐用,抗老化,具有良好的防腐性能。运输方便,安装简便快捷。过滤精度高,负荷强度高。

用途:用于园林、公园、农业、基础设施、交通围栏、装饰或防护。

Material: Low carbon steel wire.

Manufacturing process:The fence is welded from high quality galvanized steel wire with corrugation in the middle and then coated with PVC.

Characteristics:Beautiful and generous, durable, anti - aging, with good anti-corrosion performance. Convenient transportation, easy and quick installation. Good filtration precision, high load intensity.

Application:Used in gardens, parks, agriculture, infrastructure, traffic fencing, decoration or protection.



Mesh		Wire Thickness(mm)		Height(cm)	Length(m)
In Inch	In MM	Before Coating	After Coating		
2" X 2"	50.8 X 50.8	1.6-2.5	2.0-3.0	50-200	5-25
2" X 3"	50.8 X 76.2				
2" X 4"	50.8 X 101.6				
3" X 4"	76.2 X 101.6				

Package:

Each roll with plastic film absorbed.

Carton packing,pallet packing or packing as per the customer's request.

Chain link fence

勾花网 >>>

材质:优质低碳钢丝、不锈钢丝。


特点:美观实用、网面平整、结构坚固、不易腐蚀、使用期长。

用途:又称菱形围栏、菱形围栏、旋风围栏,可用于体育、田径、河岸、建筑、住宅等场所的围栏,也可用于动物围栏。

Material: High quality low carbon steel wire, stainless steel wire

Characteristics: Beautiful and practical, smooth net surface, solid structure, not easy to corrosion, long service life.

Application: Chain link fence also known as rhombic fence, diamond fence or cyclone fence, Which used as fencing for sports, field, river banks, construction and residence, also animal fencing.

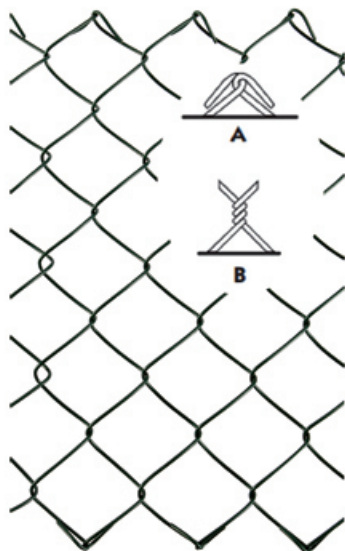

Galvanized Chain Link Fence	Mesh	Wire Thickness	Width	Length
	mm	mm	m	m
	25	1.6-3.0	0.5-3	5-25
	40			
	50			
	60			
PVC Coated Chain Link Fence	Mesh	Wire Thickness	Width	Length
	mm	mm	m	m
Package: In compressed roll, plastic film used for layers separating, the top and bottom wrapped thick plastic film.				

Border Fence

花园网 >>>

材质:低碳钢丝。


类型:编织花园网,电焊花园网。

用途:用作花园边界或花坛的围栏。

Material: Low carbon steel wire.

Type: Weaving border fence, Welded border fence.

Application: Used as a fence for garden borders or flower beds.

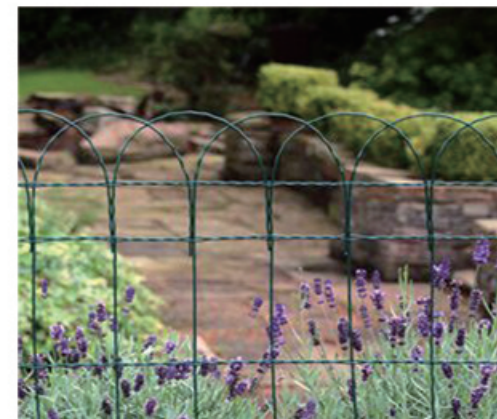

Weave Border Fence	Mesh	Wire Thickness	Height	Length
	mm	mm	cm	m
	150×90	1. 4/2. 4 and 2. 0/3. 0	25	5
			40	10
			65	15
			90	20
		120	25	
Welded Border Fence	Mesh	Wire Thickness	Height	Length
	mm	mm	cm	m
	150×90	2. 0/2. 4	25	5
			40	10
			65	15
			90	20
		120	25	
Package: Each roll with plastic film absorbed. Carton packing,pallet packing or packing as per the customer's request.				

Gabion Box



石笼网 >>>

石笼网是用金属丝制成的容器,通过六角网编织而成的.丝径取决于网孔尺寸,可分为镀锌六角网,PVC涂塑六角网.

用途:泄洪坝和导流坝,滨海区防御工程,桥梁保护,道路防护.

Gabion Box are wire containers made of hexagonal wire netting through woven.Wire thickness depends on the mesh wire. Galvanized hexagonal wire netting,PVC coated hexagonal wire netting.

Applications:Spillway and diversion DAMS, coastal area defense works, bridge protection, road protection.

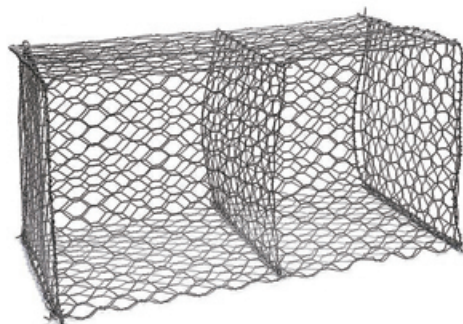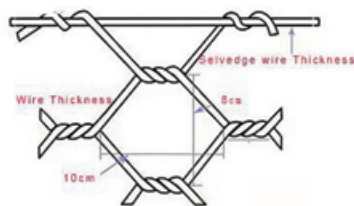

Mesh(mm)	Wire Thickness(mm)	Sewage wire Thickness(mm)	Size(m)
60×80	2.0-4.0	3.0-4.0	2.0×0.5×0.5 2.0×1.0×0.5 4.0×1.0×0.5 2.0×1.0×1.0 4.0×1.0×1.0 2.0×1.5×1.0
80×100			
80×120			
100×120			
100×150			
120×150			

Galvanized Welded Gabion Box



电焊石笼网 >>>

这种格宾笼是由镀锌电焊网片制成,易于组装,里面装满坚硬的石头就可以成为石墙,是理想的花园装饰墙.

一套包括6张网片和12个螺旋丝.

This gabion is made of galvanized welded mesh panels,easy to assemble, filled with hard stone can become a stone wall, is the ideal garden wall decoration.

One whole set including 6 pcs mesh sheet and 12 pcs spirals.

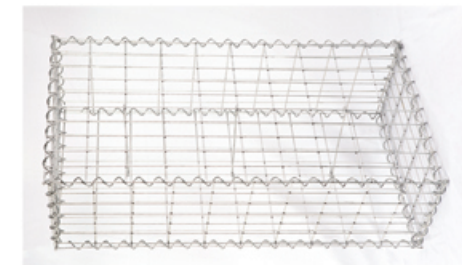


Mesh (mm)	Wire Thickness (mm)	Size (cm)
5×5	3.5, 4	80×20×20
5×5	3.5, 4	100×20×20
5×5	3.5, 4	150×20×20
5×5	3.5, 4	200×20×20
5×5	3.5, 4	250×20×20
5×10	4	30×30×30
5×10	4	40×40×40
5×10	4	80×40×40
5×10	4	100×40×30
5×10	4	150×100×30
5×10	4	200×50×50
10×10	4	60×60×60
10×10	4	100×50×30
10×10	4	100×80×30
10×10	4	100×100×50
10×10	4	150×50×50
10×10	4	200×250×50

Galvanized Iron Wire Window Screen 镀锌铁丝窗纱》》》

镀锌铁丝窗纱是由镀锌铁丝编织而成的,广泛用于纱门纱窗以防止昆虫进入。

Galvanized iron wire window screens are woven from galvanized iron wire and are widely used for screen doors and windows to keep out insects.

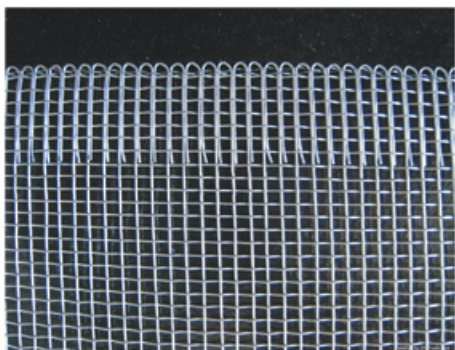

Mesh(mm)	Wire Thickness(mm)	Width(m)	Length(m)
2x2	1.2,1.0	1.0 1.5	15 25 30
3x3	1.0,0.90		
4x4	0.90,0.80,0.70		
5x5	0.70,0.60,0.50		
6x6	0.70,0.60,0.50		
8x8	0.60,0.55,0.51		
10x10	0.50,0.40,0.30		
12x12	0.60,0.50,0.40,0.30		
14x14	0.60,0.50,0.40,0.30		
16x16	0.60,0.50,0.40,0.30		
18x18	0.40,0.35,0.30,0.25		
20x20	0.40,0.35,0.30		
28x28	0.23,0.21,0.19		
30x30	0.23,0.21,0.19		
40x40	0.23,0.21,0.19		

Aluminium Alloy Window Screen 铝合金窗纱》》》

铝合金窗纱:由铝镁合金线编织而成,耐腐蚀、防锈、耐热更耐用,使用寿命长。


作为住宅和商业用途,用于纱门、纱窗和走廊以防止昆虫和蚊子打扰。

Aluminium Alloy Window Screen:

Woven from aluminum-magnesium alloy wire.

Woven from aluminum wire or aluminum-magnesium alloy wire.

For residential and commercial use, for screen doors, windows, and corridors to prevent insects and mosquitoes from interrupting.

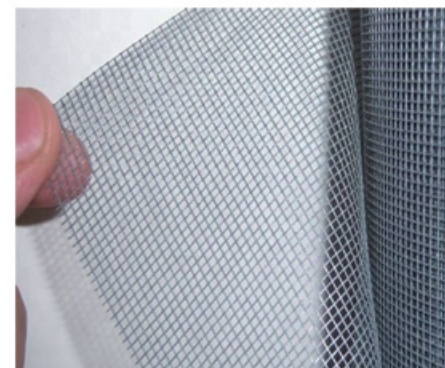

Mesh(mm)	Wire Thickness(mm)	Height(cm)	Length(m)
12x12	0.28-0.28	50 - 150	
14x14	0.25-0.21		
16x14	0.25-0.21		
16x16	0.25-0.21		
18x16	0.25-0.21		
18x18	0.25-0.21		

Stainless Steel Window Screen

不锈钢窗纱》》》

不锈钢窗纱:由不锈钢丝编织或焊接而成。

编织方式:平纹编织、斜纹编织或荷兰纹编织

广泛用于石油、化工、环保、矿山、航空、造纸、电子、冶金等行业。


Stainless Steel Window Screen:

Made of stainless steel wire by weaving or welding

Types of weave:

Plain Weave, Twill Weave or Dutch Weave.

Widely used in petroleum, chemical industry, environment protection, mine, airspace, paper-making, electronic, metallurgy, etc.

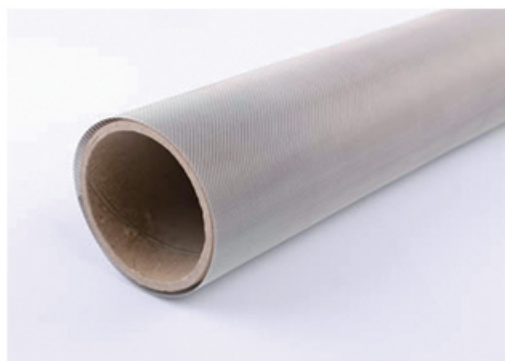

Mesh(mm)	Wire Thickness (mm)	Aperture(mm)
2×2	1.8	10.9
3×3	1.6	6.866
4×4	1.2	5.15
5×5	0.91	4.17
6×6	0.8	3.433
8×8	0.6	2.575
10×10	0.55	1.99
12×12	0.5	1.616
14×14	0.45	1.362
16×16	0.4	1.188
18×18	0.35	1.06
20×20	0.3	0.97
26×26	0.28	0.696
30×30	0.25	0.596
40×40	0.21	0.425

Fiberglass Window Screen

玻璃纤维窗纱》》》

玻璃纤维窗纱:由玻璃纤维再涂塑而成.具有很好的阻燃性能,通风、采光好,透气性好等特点.广泛用于门窗纱窗,防止昆虫进入。

Fiberglass Window Screen:

Made of glass fiber then plastic coating.

It has good flame retardant performance, good ventilation, light, air permeability and so on. Widely used for window screen to prevent insects from entering



Mesh(mm)	Wire Thickness (mm)	Height (cm)	Length (m)
14×14	0.25	50-300	5 300
16×14	0.23		
16×16	0.23		
18×14	0.23, 0.20		
18×16	0.17		
18×18	0.17, 0.12		

Hot Dipped Galvanized Wire

热镀锌丝 >>>

热镀锌铁丝采用优质Q195低碳环保钢材,经过先进的生产工艺拉拔-退火-酸洗-热镀锌而成的,色泽光亮,丝质柔软,丝径从0.5-5.0mm.使用寿命周期10年以上.

Hot dipped galvanized iron wire is made of high quality Q195 low-carbon steel, through advanced production process drawing - annealing - pickling - hot dip galvanized, bright color, soft silk, wire diameter from 0.5-5.0mm. Service life cycle of more than 10 years.

Diameter range	BWG6 - BWG26
Zinc coated	40-350g/m ²
Tensile strength	350-550N/mm ²
Elongation	15%
Coil weight	1kg-1000kg or as clients' requirements



Gauge	Common Wire Gauge And Diameters Table					
	SWG		BWC		AWG	
	Inch	mm	Inch	mm	Inch	mm
8	0.16	4.046	0.165	4.191	0.1285	3.264
9	0.144	3.658	0.148	3.759	0.1144	2.906
10	0.128	3.215	0.134	3.404	0.1019	2.588
11	0.116	2.946	0.12	3.048	0.0907	2.305
12	0.104	2.642	0.109	2.769	0.0808	2.053
13	0.092	2.337	0.095	2.413	0.072	1.828
14	0.08	2.032	0.083	2.108	0.0641	1.628
15	0.072	1.829	0.072	1.829	0.0571	1.45
16	0.064	1.626	0.065	1.651	0.0508	1.291
17	0.056	1.422	0.058	1.473	0.0453	1.15
18	0.048	1.219	0.049	1.245	0.0403	1.024
19	0.04	1.016	0.042	1.067	0.0359	0.912
20	0.036	0.914	0.035	0.839	0.032	0.812
21	0.032	0.813	0.032	0.813	0.0285	0.723
22	0.028	0.711	0.028	0.711	0.02535	0.644
23	0.024	0.61	0.025	0.635	0.02256	0.573
24	0.022	0.559	0.022	0.559	0.02011	0.511
25	0.02	0.508	0.02	0.508	0.01791	0.455
26	0.018	0.457	0.018	0.457	0.01594	0.405

Electro Galvanized Wire

电镀锌丝 >>>

电镀锌丝采用精选优质Q195低碳钢材经过先进的设备进行拉拔-退火-酸洗-镀锌而成.色泽光亮,防锈耐腐蚀.广泛应用于农业、建筑行业.

Electric galvanized wire is made of selected quality Q195 low carbon steel after advanced equipment for drawing - annealing - pickling - galvanized. Bright color, rust and corrosion resistance. Widely used in agricultural construction industry.



Black Annealed Tie Wire

褪火黑丝 >>>

黑色退火丝由低碳钢丝制成,用于编织丝网、打捆、建筑.

特点:比普通黑线柔软,柔韧性强,柔软均匀,色度一致.

包装:里面用塑料膜包裹,外边用编织袋.

里面用塑料膜包裹,外面用粗麻布.

Black annealed wire is made of low carbon wire, and used for weaving wire mesh, baling or construction.

Characteristic: It's softer than ordinary black wire, Stronger flexibility, Uniformity of softness, chromaticity is the same.

Package: Inside with plastic film, outside weaving bag. Inside with plastic film, outside hessian cloth.



Straight cut wire

截断丝 >>>

材质:Q195低碳钢丝

用途:广泛应用于建筑行业、工艺品、日常用捆绑丝.

Material: Low carbon steel Q195

Application: Construction building, crafts, daily binding.



Galvanized Wire With Dispenser

多功能花园铁丝,家庭,花园和爱好.优良的防锈,由于镀锌处理,提高了电线的耐久性.可在室内和室外使用.

有不同长度和直径可供选择.非常适合园艺和农业用的捆扎线.

Versatile garden wire for home, garden and hobby.

Excellent rust-protection due to galvanized finish improves the durability of the wire. Can be used inside and outside of door.

Available in different lengths and diameters.

Ideal for garden and agriculture binding wire.

Thickness(mm)	Length(m)
0.7	75
0.8	50
0.9	50
1	50
1.1	50
1.2	50
1.3	50
1.4	50
1.5	50
1.6	50
1.8	50



PVC Coated Wire With Dispenser

Thickness(mm)	Length(m)
0.6/0.9	75
0.8/1.2	50
1.0/1.5	50
1.1/1.6	50



Galvanized/PVC Coated Tension Wire

用途:园艺维修和保养. Horticulture Repair and Maintain

Thickness(mm)	Length(m)
1.5/2.0	100
1.6/2.2	
1.8/2.6	
2.0/3.0	
2.2/3.2	
2.4/3.5	



Security Panel Fence

安全防护围栏》》》

安全防护围栏,又称358护栏,以防攀爬、防切割而闻名.作为安全护栏,采用优质碳钢丝焊接护栏板,在一定程度上提供了私密性.

Security Fence, also called 358 fence, which is well-known as anti-climb & anti-cut through barrier. As a security fence, using high quality carbon steel wire to weld a fence panel, it can provide privacy in some extent.



Height(mm)	Width(mm)	Mesh Size(mm)	Wire Thickness(mm)
1200	1500 2000 2500	76.2×12.7 75.0×12.5	3.0-4.0
1400			
1600			
1800			
2000			
2200			
Package: With plastic film and pallet.			

Double Wire Panel Fence

双丝网围栏》》》

双丝网围栏是一种结构特殊且极其坚固的围栏系统,超强的抗撞击损坏能力使其成为商业和工业领域的理想选择。

材料:低碳铁丝、镀锌铁丝。

表面处理:热镀锌,电镀锌+PVC涂层,热镀锌+PVC涂层。

应用:广泛应用于家庭、花园、商业、工业的装饰防护作用。

用途:主要用于草原、边界、铁路、公路、监狱、私宅、银行、印钞厂的隔离保护,也广泛用于军事基地、工业、农业、畜牧业、种植园的围栏保护。

Double wire panel fence is extremely strong fence system with a special structure, superstrong degree of resistance to impact damage making it an ideal choice for industrial and commercial areas.

Material: Low carbon steel wire, stainless steel wire.

Surface Finish: Hot dipped galvanized, Electro galvanized wire + powder coated, Hot dipped galvanized wire + powder coated.

Application: Widely used in home, garden, commercial, industrial decoration and protection.



Height*Width Panel (mm)	Mesh Size (mm)	Wire Thickness (mm)	Wire Thickness (mm)	Post Of Height (mm)
830*2500	50*200	8*2+6	6*2+5	1300
1030*2500	50*200	8*2+6	6*2+5	1500
1230*2500	50*200	8*2+6	6*2+5	1700
1430*2500	50*200	8*2+6	6*2+5	1900
1630*2500	50*200	8*2+6	6*2+5	2100
1830*2500	50*200	8*2+6	6*2+5	2400
2030*2500	50*200	8*2+6	6*2+5	2600
Package: With plastic film and pallet.				

3D Panel Fence

3D围栏》》》

3D围栏采用“V”折叠加强,增加刚性和强度,所有面板都有一个30毫米的倒钩顶部边缘,以防止攀爬。

选用优质线材为原料,通过拉丝、校直、焊接、弯曲、磷化、粉末涂层或PVC涂层,包装。

用途:作为防护围栏,应用于以下场所:公路和交通:公路、铁路、城市交通、工业园区:工厂、观光园区。

私人花园:庭院、别墅。公共场所:公园、动物园、火车站、草坪。商业场所:公司、酒店、超市。

The 3D panel is reinforced with "V" folding to increase the rigidity and strength. All the panels have a 30mm barbed top edge for anti-climbing.

Choose the high quality of wire as raw materials, through wire drawing, straightening, welding, bending, phosphatizing, Powder coating or PVC coated, Packing.

Application: As a protective fence, it should be used in the following places:


Roads and Transportation: roads, railways, urban transportation.

Industrial park: factories, sightseeing park.

Private garden: courtyard, villa.

Public places: parks, zoos, train stations, lawns.

Business places: companies, hotels, supermarkets.

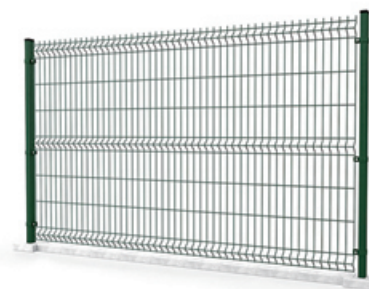

Height (mm)	Width (mm)	Mesh Size (mm)	Wire Thickness (mm)
830	2200 2500	50*100 50*200	4.0-5.0
1030			
1230			
1530			
1730			
1830			
2030			

Barbed wire

刺绳》》》

刺绳由全自动化的刺绳机拧编而成,种类分为单丝拧编和双丝拧编。

原材料:优质的低碳钢丝(电镀锌、热镀锌、涂塑),PVC刺绳芯线可以是镀锌丝和黑丝。

特点:防腐、抗老化、抗晒、耐用等特点。

Barbed wire is twisted and waaved by the fully automatic barbed wire machine.


Product variety: Single twist barbed wire and double twist barbed wire.

Wire Material :High quality low carbon steel wire (electric galvanized, hot galvanized coated,PVC coated),PVC barbed wire can be galvanized wire and black wire.

Characteristics:Anti – corrosion, anti – aging, anti – sun, durable.

Application:

Mainly serves in isolation and protection of grassland,boundary,railway,highway,prisons,private residence,bank,bill printing factory,and also widely used in military base, industry,agriculture,animal husbandry,plantation for fencing.

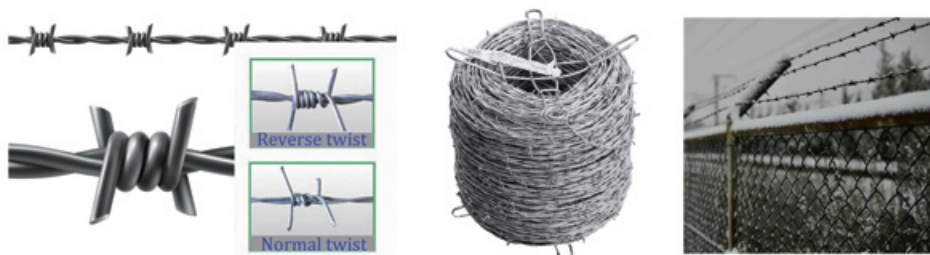

Type	Wire Gauge(SWG)	Barb Distance	Barb Length
		mm	mm
Electro Galvanized Barbed Wire Hot-Dip Galvanized Barbed wire	BWG10xBWG12	75-150	15-30
	BWG12xBWG12		
	BWG12xBWG14		
	BWG14xBWG14		
	BWG14xBWG16		
	BWG16xBWG16		
	BWG16xBWG18		
	BWG17xBWG17		
PVC Coated Barbed Wire	Before coating:BWG11-20	75-150	15-30
	After coating:BWG8-17		
Package: Bare packing with bulk or on pallet. With plastic film and pallet.			

Razor Wire

刀片刺绳》》》

应用:广泛应用于监狱护栏、哨所、边境、军队及许多高安全警戒地区进行安全按保护。

材质:热镀锌片配热镀锌丝,不锈钢片配不锈钢丝。

刀片:钢板一次冲压成型或不锈钢板一次冲压成型。

金属丝:热镀锌丝、热镀锌钢丝或不锈钢丝。

Application: Widely used in prison guardrail, guard post, border, army and many high security areas for security protection.

Material: Hot dipped galvanized sheet with hot dipped galvanized wire, stainless steel sheet with stainless steel wire.

Blade: Steel plate by one-time punching moulding or stainless steel plate by one-time punching moulding.

Wire: Hot dipped galvanized metal wire,hot dipped galvanized steel wire or stainless steel wire.



Reference	Thickness	Wire Dia	Barb Length	Barb Width	Barb Spacing
No.	mm	mm	mm	mm	mm
BTO-10	0.5+0.05	2.5+0.1	10+1	13+1	26+1
BTO-12	0.5+0.05	2.5+0.1	12+1	15+1	26+1
BTO-18	0.5+0.05	2.5+0.1	18+1	15+1	33+1
BTO-22	0.5+0.05	2.5+0.1	22+1	15+1	34+1
BTO-28	0.5+0.05	2.5	28	15	45+1
BTO-30	0.5+0.05	2.5	30	18	45+1
CBT-60	0.6+0.05	2.5+0.1	60+2	32+1	100+2
CBT-65	0.6+0.05	2.5+0.1	65+2	21+1	100+2

Packing:

In compressed coil, then in bundle or carton.

Inner waterproof paper with woven bag outside. Or as customer's request.

Building Panel

建筑网片》》》

建筑面板用于混凝土墙的加固,由于墙体使用的材料通常为电镀锌丝,为客户节省成本.



种类:镀锌网片、涂塑网片、不锈钢网片.

用途:广泛用于展览样品货架、建筑行业、市政建设、养殖业.

The Building Panel to be used into concrete wall for strengthening, because it to be used into wall, the material usually to be electro galvanized wire so that can save cost for customer.

Assortments available: Galvanized Welded mesh panel, PVC Coated Welded mesh panel, Stainless Steel Welded mesh Panel.

Application: Widely used in exhibition sample shelves, construction industry, municipal construction, breeding industry.

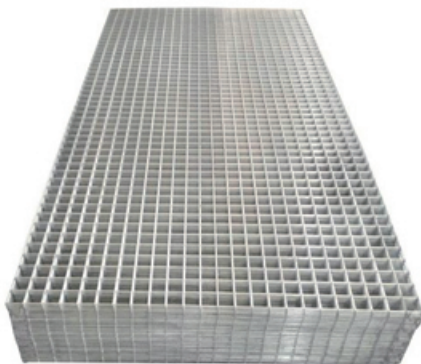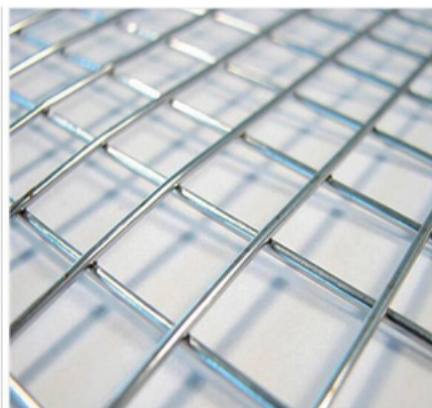


Mesh Size(mm)	Wire Thickness(mm)	Height (mm)	Width(mm)
25×25	1.5-3.0	2000	1000 1500 2000
30×30	2.9-4.0	2000	
40×40	3.9-4.0	2000	
50×50	1.5-4.0	2000	
100×50	3.5-5.0	2000	
200×50	3.5-5.0	2000	
Package: With plastic film and pallet.			

Euro Panel Fence

欧式网片》》》

特点:安装方便、性价比高、耐酸、耐碱、焊接牢固、防锈、抗腐蚀能力强、美观、用途广泛.

Features: Easy Installation, Cost effective , Acid-resistant, alkali-resistant, firm welding strong anti rust and anti corrosion ability, beautiful, and wide usage.

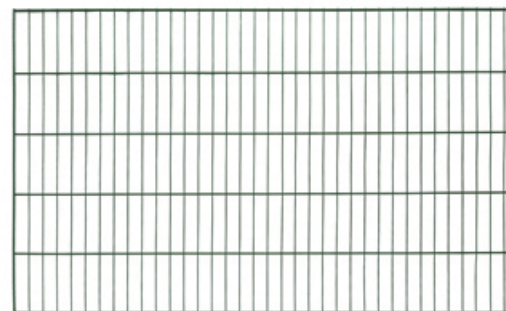

Mesh Size(mm)	Wire Thickness(mm)	Height(mm)	Width(mm)
250×50	8/6	750	2000
		1000	
		1250	
		1500	
		1750	

Post 立柱》》》

可分为圆型柱、方型柱、T型柱、Y型柱、L型柱。


用于农场围栏柱、花园围栏柱或田野围栏柱。

Round post, Square post, T post, Y post, L post.

Used farm fence post, garden fencepost or field fence post.



ROUND POST



SQUARE POST

Outer Dia(mm)	Thickness(mm)	Height (mm)
Ø32	1.0, 1.2, 1.5	800-2000
Ø34	1.0, 1.2, 1.5	800-2000
Ø38	1.0, 1.2, 1.5	800-2000
Ø40	1.0, 1.2, 1.5	800-2500
Ø48	1.5, 2.0	800-3000
Ø60	1.5, 2.0	800-3000



Outer Dia(mm)	Thickness(mm)	Height (mm)
40×40	1.2, 1.5	800-2500
60×40	1.5, 2.0	800-3000
60×60	1.5, 2.0	800-3000
80×80	1.5, 2.0, 2.5	800-3000
100×100	2.0, 2.5	800-3000



Post 立柱》》》

规格 Specification	T/Y/L 30, 35, 40
尺寸 Size(mm)	30×30×3, 35×35×33.5, 40×40×4
长度 Length	To design according to panel size & customers' requirement



T-POST



Y-POST



L-POST

紧线器 Wire Strainer

紧线器是用来拧紧铁丝的,将铁丝插入紧线器中,用开口扳手将铁丝拉紧,直到铁丝拧紧到最大。

材质:低碳钢

表面处理:热镀锌,电镀锌,PVC涂塑。

Wire strainer is used to tighten the line wire, the wire is inserted into the strainer, tensions the wire by means of an open-end wrench, until the wires are tightened to the maximum.

Material: low carbon steel

Surface treatment: Hot dipped galvanized,
electric galvanized, PVC coated.



Garden Single Gate

花园单门》》》

可分为圆柱单门和方柱单门。

由镀锌圆形管或镀锌方形管焊接而成,内部热镀锌,外部粉末涂层。颜色可根据客户要求选择,完整的收缩包装DIY组装,其他尺寸可根据要求提供。

Round Post Single Gate, Square Post Single Gate.

Made of galvanized circular or galvanized square tube with welded panel inner hot dipped galvanized, outer powder coated. The color can be as per the customer's selection. Complete shrink packing for the DIY assembly. Other size maybe available upon request.



Round Post Single Gate	Full set		Mesh and frame		Post	
	width	height	mesh size	frame size	size	height
	mm	mm	mm	mm	mm	mm
	80		50×50 50×100	Ø40	Ø60	130
	100	100				150
	125	125				175
	150	150				200
	175					225
	200					250



Square Post Single Gate	Full set		Mesh and frame		Post	
	width	height	mesh size	frame size	size	height
	mm	mm	mm	mm	mm	mm
	80		50×50 50×100 50×200	40×40	60×60	130
	100	100				150
	125	125				175
	150	150				200
	175					225
	200					250




Package:
Each set with plastic film absorbed.
Carton packing, pallet packing or packing as per the customer's request.

Garden Double Gate

花园双门》》》

可分为圆柱双门和方柱双门。

Round Post Double Gate, Square Post Double Gate.

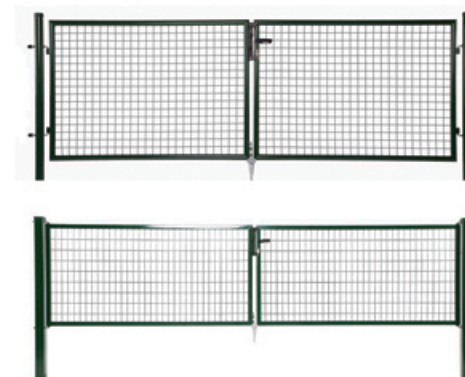

Round Post Double Gate	Full set		Mesh and frame		Post	
	width	height	mesh size	frame size	size	height
	mm	mm	mm	mm	mm	mm
	200 300 400	100	50×50 50×100	Ø40	Ø60	150
		125				175
		150				200
		175				225
		200				250

Square Post Double Gate	Full set		Mesh and frame		Post	
	width	height	mesh size	frame size	size	height
	mm	mm	mm	mm	mm	mm
	200 300 400	100	50×50 50×100 50×200	40×40	60×60	160
		120				180
		150				210
		180				240
		200				260

Package:
Each set with plastic film absorbed.
Carton packing, pallet packing or packing as per the customer's request.